

Customer: _____

Address: _____

Contact: _____

Phone: () _____ Fax: () _____

Account No: _____

Page: _____ of _____


Cust Order No: _____

Date Ordered: _____

Signature: _____


Step 1: Select Profile

- 50/0 Lip Profile
 50/8 Lip Profile
 50/19 Lip Profile
 50/31 Lip Profile
 50/43 Lip Profile
 50/50 Box Profile
 50/50 Stainless Steel

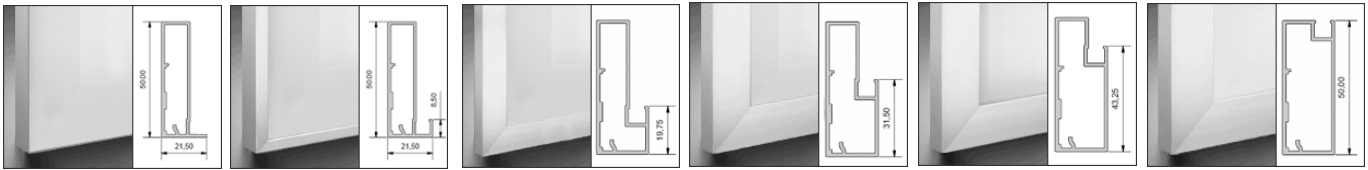

Step 2: Select Application

- Full Overlay
 Half Overlay
 Inlay
 Drawer Front
 Microwave
 Gas Lift
 Aventos (Liftup Bifold)

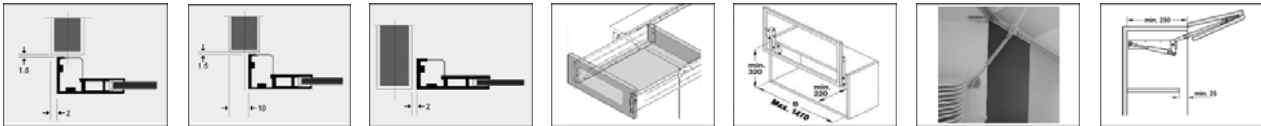

- Klok Stay



** Please Note: all measurements on this order form are based on the assumption that the cabinet wall thickness is 16mm.

Type of hinge required 107° 120° 170° Other

Hinge position from top and bottom mm (default is 96mm)

Step 3: Select Glass/Insert

- Clear Glass
 Satinlite Glass
 Starphire Glass
 Acid Etched Glass
 Frosted Glass (Soft White)
 Smoked Glass
 Vinyl Back Mirror Glass
 Clear Sandblasted Glass
 Sparkling Crystal Glass
 Painted Clear Glass *
 Milky White Glass
 Painted Starphire Glass *

All doors are supplied with safety or toughened glass
 * Name: _____
 Colour Code: _____
 Please note: Other than Dulux a colour sample must be supplied.

Step 4: Supply Qty and Size of Doors

Qty	Height (mm) - Max 2300	Width (mm) - Max 600	Handle Holes per Door	Hinges per Door	Notes
			_____ <input type="checkbox"/> LH <input type="checkbox"/> RH _____ <input type="checkbox"/> LH <input type="checkbox"/> RH _____ <input type="checkbox"/> LH <input type="checkbox"/> RH _____ <input type="checkbox"/> LH <input type="checkbox"/> RH _____ <input type="checkbox"/> LH <input type="checkbox"/> RH _____ <input type="checkbox"/> LH <input type="checkbox"/> RH		

Step 5: Special Instructions

Handle Holes	Microwave	Aventos	Gas Lift	Klok Stay
Only required for 50/8, 50/15, 50/19 profiles - if handle holes are required please include a drawing with positions.	Internal measurements: min 320H, 220D, max 1470W, max 8kg. Allow clearance of 35mm on each side for appliances. Open door covers 225mm of cabinet.	Please type in OA size of the door. Internal depth min 250mm. Shelves min 25mm from front edge. Door size min 520H, max 1200W or 8kg.	Unless specified in "Special Instructions" gas lift will be installed in right hand side. Min 264H internal size of cabinet. Max 600H (Milky White glass only 500H) or max 1300W or max 6kg.	Min 300H internal size of cabinet. Max 700H (Milky White glass only 600H) or max 1300W or max 8kg. Only available in 40 / Box profiles. Can also be used as "flap down" door.

