

Customer: _____

Address: _____

Contact: _____

Phone: () _____ Fax: () _____

Account No: _____

Page: _____ of _____


Cust Order No: _____

Date Ordered: _____

Signature: _____


Step 1: Select Profile

- 25mm Flat Profile
 30mm Flat Profile
 30mm Curve Profile
 35mm Flat Profile
 40mm Flat Profile
 40mm Curve Profile
 40mm Flat Stainless Steel

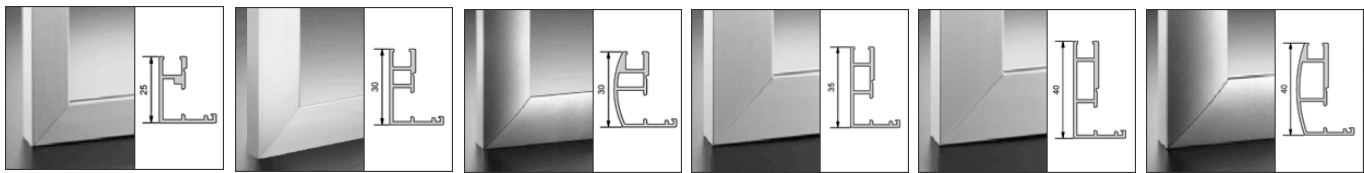

Step 2: Select Application

- Full Overlay
 Half Overlay
 Inlay
 Drawer Front
 Microwave
 Gas Lift
 Spring Flap

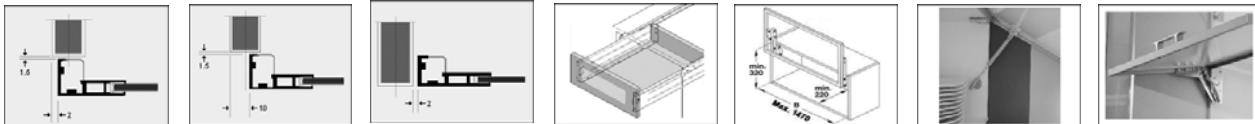

- Klok Stay



** Please Note: all measurements on this order form are based on the assumption that the cabinet wall thickness is 16mm.

Step 3: Select Glass/Insert

- Clear Glass Satinlite Glass
 Starphire Glass Acid Etched Glass
 Frosted Glass (Soft White) Smoked Glass
 Vinyl Back Mirror Glass Clear Sandblasted Glass
 Sparkling Crystal Glass Painted Clear Glass *
 Milky White Glass Painted Starphire Glass *

All doors are supplied with safety or toughened glass

* Name: _____

Colour Code: _____

Please note: Other than Dulux a colour sample must be supplied

Step 4: Supply Qty and Size of Doors

Qty	Height (mm) - Max 2200	Width (mm) - Max 600	Notes

Step 5: Special Instructions

Special Application Notes

Microwave	Gas Lift	Spring Flap	Klok Stay
Internal measurements: min 320H, 220D, max 1470W, max 8kg. Allow clearance of 35mm on each side for appliances. Open door covers 225mm of cabinet.	Unless specified in "Special Instructions" gas lift will be installed in right hand side. Min 264H internal size of cabinet. Max 600H (Milky White glass only 500H) or max 1300W or max 6kg.	No hinges are installed in this door. Spring loaded stay mounted in each side. Min 200H internal size of cabinet. Max 500H (Milky White glass only 400H) or max 1300W or max 5kg.	Min 300H internal size of cabinet. Max 700H (Milky White glass only 600H) or max 1300W or max 8kg. Only available in 40 / Box profiles. Can also be used as "flap down" door.